

Fiber Optic Video & Audio Transmission 8-Channel Video + 8 Simplex Analog Audio over Fiber



System Design

Fiber Optic Video & Audio Transmitter & Receiver VOS-8800FFT/R provides for the digital transmission of 8-Channel Composite Video and 8-Channel simplex analog audio over fiber.



Stand-alone or rack-mount. All units of VOS-8800FFT/R come in an insert card version. The cards can be inserted into our our 14-slot, 19inch 4u or 6U rack-mountable card cage (VOS-CH04 or VOS-CH06). One 8-Channel video and 8 simplex audio card require two slots widths.

Data

Single-Mode or Multi-Mode, VOS-8800FFT/R can support FC /PC or ST/PC Optical connector, can be used in Daisy-Chain system (Need to customize). The Transmission distance range according to the Optical Budget. Manufacturer's standard is: Single-mode 20km or Multi-mode 1.2km.






Ethernet

Features

- Support Point-to-Point or Daisy-Chain connection
- Uncompressed Digital Composite Video over one fiber
- 24-Bit Digitally Encoded Audio over one Fiber
- Compatible with all PAL, NTSC, SECAM Video Systems
- Multi-mode Fiber Support for Distances up to 1.2 km
- Single-Mode Fiber Support for Distances up to 100 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Stand alone or rack-mount

Typical Configuration

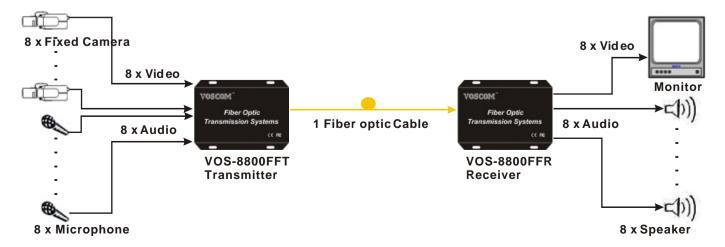

Video & Audio over Fiber

Ordering Information

Model	Fiber Mode	Wavelengths	Optical Power	Maximum Transmission		
Transmitter	Receiver		_	Budget	Distance	
VOS-8800FFMT	VOS-8800FFMR	Multi-Mode	1310nm	10dB	1.2km	
VOS-8800FFST	VOS-8800FFSR	Single-Mode	1310nm	12dB	20km	
VOS-8800FFST-4	VOS-8800FFSR-4	Single-Mode	1310nm	18dB	40km	
VOS-8800FFST-6	VOS-8800FFSR-6	Single-Mode	1550nm	25dB	60km	

Note:

- The Optical Power Budget data fit Mulit-mode (62.5/125 μm), Single-Mode (9/125 μm).
- When using 50/125 µm multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- · Please feel free to consult factory for any special requirement and customization

Specification

١	1	:	$ \sim $	$\overline{}$	$\overline{}$	

Number of Channels: 8-Channel Video

Input/output impedance: BNC 75Ω

Input/output Compatibility: PAL, NTSC, SECAM

Input/output voltage: 1.0 Voltp-p

Bandwidth: 6.5MHZ

Bit Resolution: 8-Bit Digital Transmission

Differential Gain: < 1.5% Differential Phase: < 1.5°

Tilt: < 5%

Signal-to-Noise Ratio(SNR): > 67 dB

Audio

Number of Channels: 8-Channel Simplex Audio

Audio input/output Level: 6 dBm

Audio in/output impedance: 600Ω Unbalanced

Bandwidth: 20Hz ~ 20KHz

Bit Resolution: 24-Bit

Signal-to-Noise Ratio(SNR): > 80 dB

Connectors

Video: 75 Ω BNC (Gold Center Pin)

Audio: Terminal Block

Optical: FC/PC or ST/PC Optional

Stand-Alone Power: Screw terminal block

Rack Power: AC line cord

Electrical & Mechanical

Input Power Requirements: DC 5V@3A

Power Adapter: AC 100V~240V

Power Consumption: < 5W

Stand-Alone Dimensions: $176.5 \text{mm} \times 158 \text{mm} \times 59 \text{mm}$ Card for 4U Rack Dimensions: $145 \text{mm} \times 170 \text{mm} \times 45.4 \text{mm}$

Shipping Weight: 2.5kg (include TX & RX)

Environmental

Operating Temperature: -45° C $\sim +75^{\circ}$ C Storage Temperature: -45° C $\sim +85^{\circ}$ C

Relative Humidity: 0%~95% (non-condensing)

MTBF: >100,000 hours

www.voscom.com 2