

# ER58000 Series

Hardened Managed 8-port 10/100BASE M12 PoE with 2-port Gigabit M12 Ethernet Switch



## Overview

EtherWAN's ER58000 Series provides a hardened 10-port switching platform supporting IEEE802.3at Power over Ethernet, high performance switching with robust management features required for railway transportation application.

The ER58000 Series is equipped with 8 x 10/100BASE-TX PoE with M12 connector, in combination with two Gigabit M12 ports. Compliant with EN50155 standard, the ER58000 Series is designed for rolling stock applications.

The IEEE802.3at PoE ports provide up to 30W/port with a total power budget of 120W, making the switch truly versatile for connecting with PoE Powered Devices (PD) with different bandwidth and power consumption requirements such as; outdoor PTZ dome cameras, wireless access points, and way-side communication devices.

Wall mountable, the ER58000 Series is equipped with EtherWAN's Alpha-Ring self-healing ring technology providing less than 15ms fault recovery time. Users are able to access management features such as port security, IGMP snooping, port-based VLAN, GARP protocols, link aggregation, via web browser, telnet, SSH, SNMP, RMON, TFTP, and RS-232 console interfaces. With the hardened specifications, the ER58000 Series is designed to operate at -40°C to 75°C in harsh environments, where high ESD, shock, and vibration may be present.

EtherWAN — "When Connectivity is Crucial."

## Spotlight

- **Railway Oriented**
  - Compliant with EN50155/EN50121-3-2/EN50121-4 railway applications
- **M12 Connectors**
  - Built-in 8-port 10/100BASE M12 plus 2-port Gigabit M12/LC connectors
- **Power over Ethernet (PoE)**
  - Provides 8-port PoE function with IEEE802.3at up to 30W per port

# Software Features

## Management

---

- Interface
  - CLI, Telnet and Web Browser
  - SNMP v1/v2c/v3
- Firmware and configuration upgrade and backup via TFTP
- Supports DHCP Server/Client
- RMON (Remote monitoring): group 1, 2, 3, 9
- Port mirroring: TX/RX and both
- NTP (Network Time Protocol) time synchronization
- IEEE802.1ab LLDP (Link Layer Discovery Protocol)

## Security

---

- MAC address filtering
- Enable/disable port
- Storm control (broadcast and multicast types)
- IEEE802.1x LAN access control
- Remote authentication through RADIUS
- SSH for CLI and Telnet security
- SSL for web security
- Multi-level user account/password against unauthorized configuration

## Quality of Service (QoS)

---

- Priority Queues: 4 queues per port
- Traffic classification based on IEEE802.1p CoS, DSCP, WRR (Weighted round robin) and strict mode
- Rate Limiting (Ingress/Egress)

## Layer 2 Features

---

- Auto-negotiation for port speed and duplex mode
- Flow Control
  - IEEE802.3x full duplex mode
  - Back-Pressure half duplex mode
- Redundant Protocol
  - IEEE802.1D Spanning Tree Protocol (STP)
  - IEEE802.1w Rapid Spanning Tree Protocol (RSTP)
  - IEEE802.1s Multiple Spanning Tree Protocol (MSTP)
  - EtherWAN's  $\alpha$ -Ring network fault recovery (<15ms) and  $\alpha$ -Chain
- VLANs
  - Port-based VLANs
  - IEEE802.1Q Tag VLANs (128 groups, 4096 VID)
  - GVRP (GARP VLAN Registration Protocol)
  - GMRP (GARP Multicast Registration Protocol)
- Link Aggregation
  - Static Trunk (2 groups, support MAC base)
  - IEEE802.3ad Link Aggregation Control Protocol
- IGMP Snooping
  - IGMP snooping v1/v2/v3

## Performance

---

- Switching Capability: 5.6 Gbps
- Packet Buffer Size: 2M bits
- MAC Address Table: 8K

# Hardware Specifications

## Technology

---

### Standards

- IEEE802.3 10BASE-T
- IEEE802.3u 100BASE-TX/100BASE-FX
- IEEE802.3ab 1000BASE-T
- IEEE802.3z 1000BASE-SX/1000BASE-LX
- IEEE802.3x Full duplex and flow control
- IEEE802.1p QoS
- IEEE802.1Q Tag VLANs
- IEEE802.1w RSTP
- IEEE802.1x Port-based Network Access Control
- IEEE802.1s MSTP
- IEEE802.3ad LACP
- IEEE802.3af/at Power over Ethernet (PoE)

### Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps
- 1,488,100pps for 1000Mbps

### Packet Buffer Memory

- 2M bits

### Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE802.3x full-duplex flow control
- Auto MDI/MDIX

### Address Table Size

- 8192 MAC addresses

## Power

---

### Input

- Redundant power inputs:  
M23: 24 - 48VDC

### Power Consumption

- Device: Max. 11W (without PoE)
- PoE power budget (depends on power input): 120W Max.

### PoE Power Output

- Port 1 to 8: IEEE802.3at, up to 30W/port

### Protection

- Overload current protection
- Reverse polarity protection

## Mechanical

---

### Casing

- Metal Case
- IP50

### Dimensions

- 288mm (W) x 161.5mm (D) x 64mm (H)  
(11.3" (W) x 6.4" (D) x 2.5" (H))

### Weight

- 2.3Kg (5.07lbs)

### Installation

- Wall mounting

## Interface

---

### Ethernet Port

- 10/100BASE-M12 D-Code 4-pin Female: 8 ports
- Gigabit-M12 A-Code 8-pin Female/LC: 2 ports

### Console Port

- One M12 port

### LED Indicators

- Per Unit: Power 1 (Green)  
Power 2 (Green)
- Per Port: Link/Activity (Green)

### Alarm Contact

- One relay M12 A-Code 4-Pin Female output with current  
1A @ 250 VAC

## Environment

---

### Operating Temperature

- -40°C to 75°C (-40°F to 167°F)  
Tested @ -40°C to 85°C (-40°F to 185°F)

### Storage Temperature

- -45°C to 85°C (-49°F to 185°F)

### Ambient Relative Humidity

- 5% to 95% (non-condensing)

## Regulatory Approvals

---

### ISO

- Manufactured in an ISO9001 facility

### EMI

---

#### FCC Part 15B, Class A

#### EN61000-6-4

#### EN55022

#### EN55011 (for EN50155)

### EMS

---

#### EN61000-6-2

- EN61000-4-2 (ESD Standards)
- EN61000-4-3 (RFI Standards)
- EN61000-4-4 (Burst Standards)
- EN61000-4-5 (Surge Standards)
- EN61000-4-6 (Induced RFI Standards)
- EN61000-4-8 (Magnetic Field Standards)
- EN61000-4-9 (Pulsed magnetic field)

### Environmental Test Compliance

---

#### IEC61373 (Vibration) for EN50155

#### IEC61373 (Shock) for EN50155

#### IEC600680-2-32 Ed (Free fall)

### Industrial Compliance


---

#### EN50155


#### EN50121-3-2

#### EN50121-4

# Application Diagram

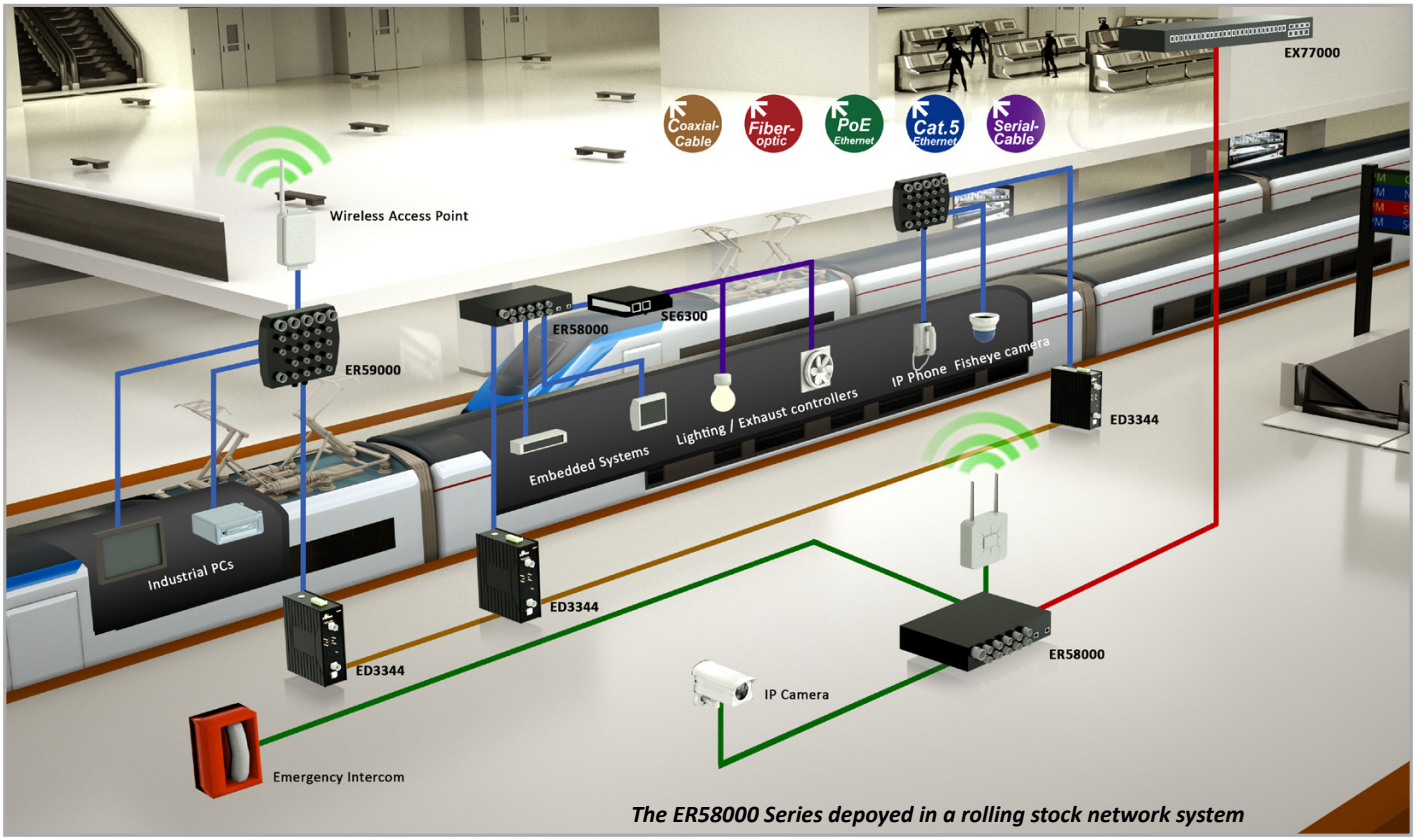

# Dimensions

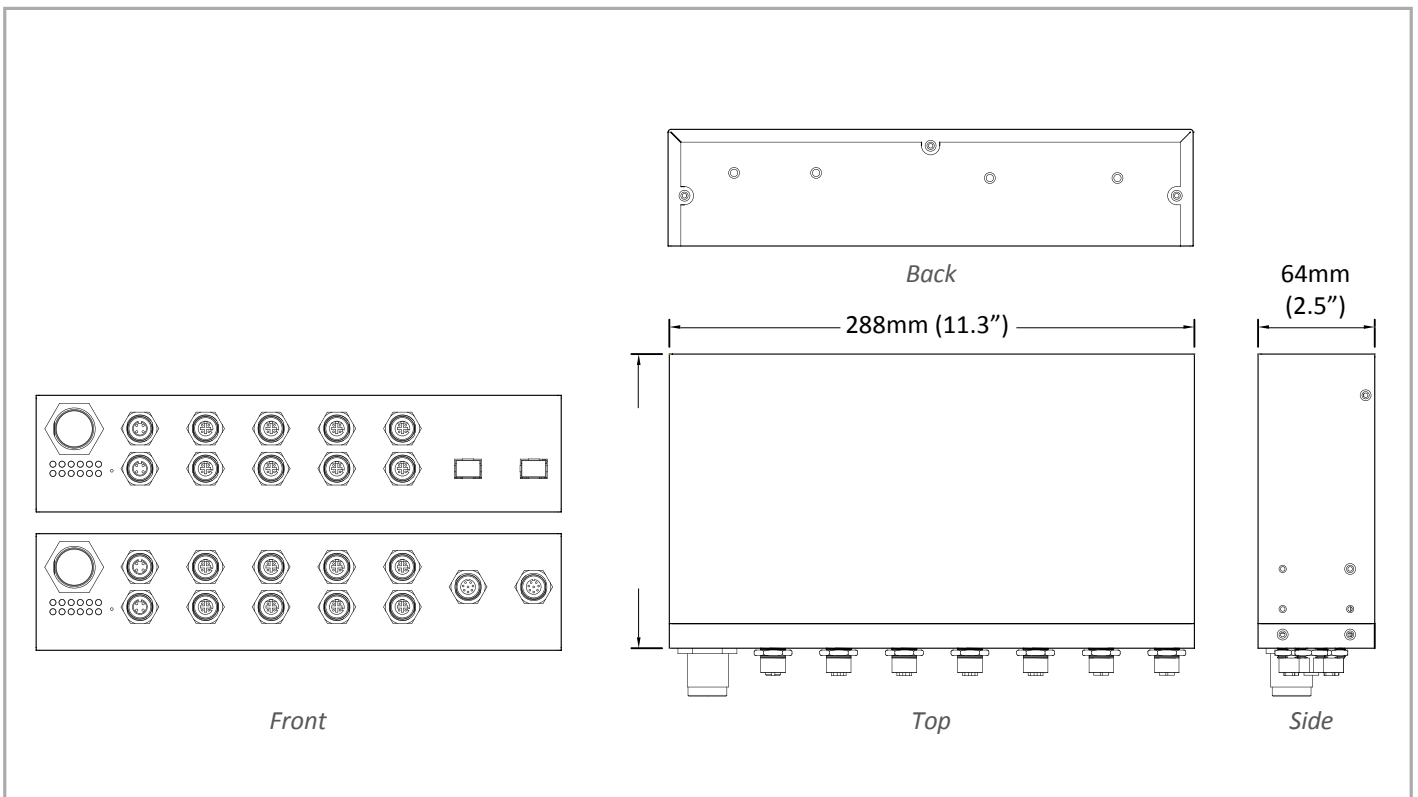

## Ordering Information

### Model

<b>ER58802-20YHT</b>	8-port 10/100BASE-M12 PoE + 2-port Gigabit Hardened Managed Ethernet Switch
----------------------	---




\* Panel mounting kit included

### Gigabit Port Options (Y)

<b>1</b>	10/100/1000BASE-TX
<b>E</b>	1000BASE-SX (LC) - 550m
<b>M</b>	1000BASE-SX (LC) - 10Km
<b>N</b>	1000BASE-LX (LC) - 20Km

\* More Gigabit options also available upon request

### Optional Accessories

<b>96G-S1N8A80WW</b>		M23 Power Connector
<b>96G-1618957XX</b>		Power cable with 6-pin female M23 connector, 2-meter cable
<b>ER58000-RJ454P</b>		4-pin M12 D-code male to 10/100BASE-TX RJ45 interface, 3-meter cable
<b>ER58000-RJ458P</b>		8-pin M12 A-code male to 10/100/1000BASE-TX RJ45 interface, 3-meter cable