

EM120 Series

100BASE-FX Multi-Mode/Single-Mode to 100BASE-FX
Single-Mode Media Converter



Overview

The EL120 Series provides media conversion between 100BASE-FX Fiber and 100BASE-FX Fiber. Easy plug-and-play design facilitates network infrastructure construction. The EL120 series is designed for SC, ST and WDM fiber connection selections. The commercial grade media converter supports EtherWAN EMC1600 chassis system for easy group installation. The EL120 is the ideal media converter for enterprise environments.

EtherWAN – “When Connectivity is Crucial”.

Spotlight

- **Plug-and-Play Media Converter**
 - Easy installation, plug-and-play without additional configuration, providing store-and-forward data transmission
- **Fiber to Fiber Conversion**
 - Supports single mode or multi-mode fiber connector
 - Supports SC/ST/WDM fiber connector
- **Optional Chassis System**
 - Supports wall mounting or EtherWAN's EMC1600 chassis system for easy group installation with power redundancy

Hardware Specifications

Technology

Standards

- IEEE802.3u 100BASE-TX/FX

Forward and Filtering Rate

- 148,810pps for 100Mbps

Power

Input Voltage

- 12VDC

Power Consumption

- 2.76W Max. 0.23A @ 12VDC

Mechanical

Casing

- Aluminum Case

Dimensions

- 80.3mm (W) x 109.2mm (D) x 23.8mm (H)
(3.16" (W) x 4.30" (D) x 0.94" (H))

Weight

- 150g (0.33lb.)

Installation

- Wall mounting or use with EMC1600 media converter chassis system

Interface

Ethernet Port

- 100BASE-FX: 2 ports

LED Indicators

- Per Unit: Power Status (Power), Link

Environment

Operating Temperature

- 0°C to 45°C (32°F to 113°F)

Storage Temperature

- -10°C to 70°C (14°F to 158°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO


- Manufactured in an ISO9001 facility

Emission Compliances


CE Mark Class A

FCC Part 15B Class A

Dimensions

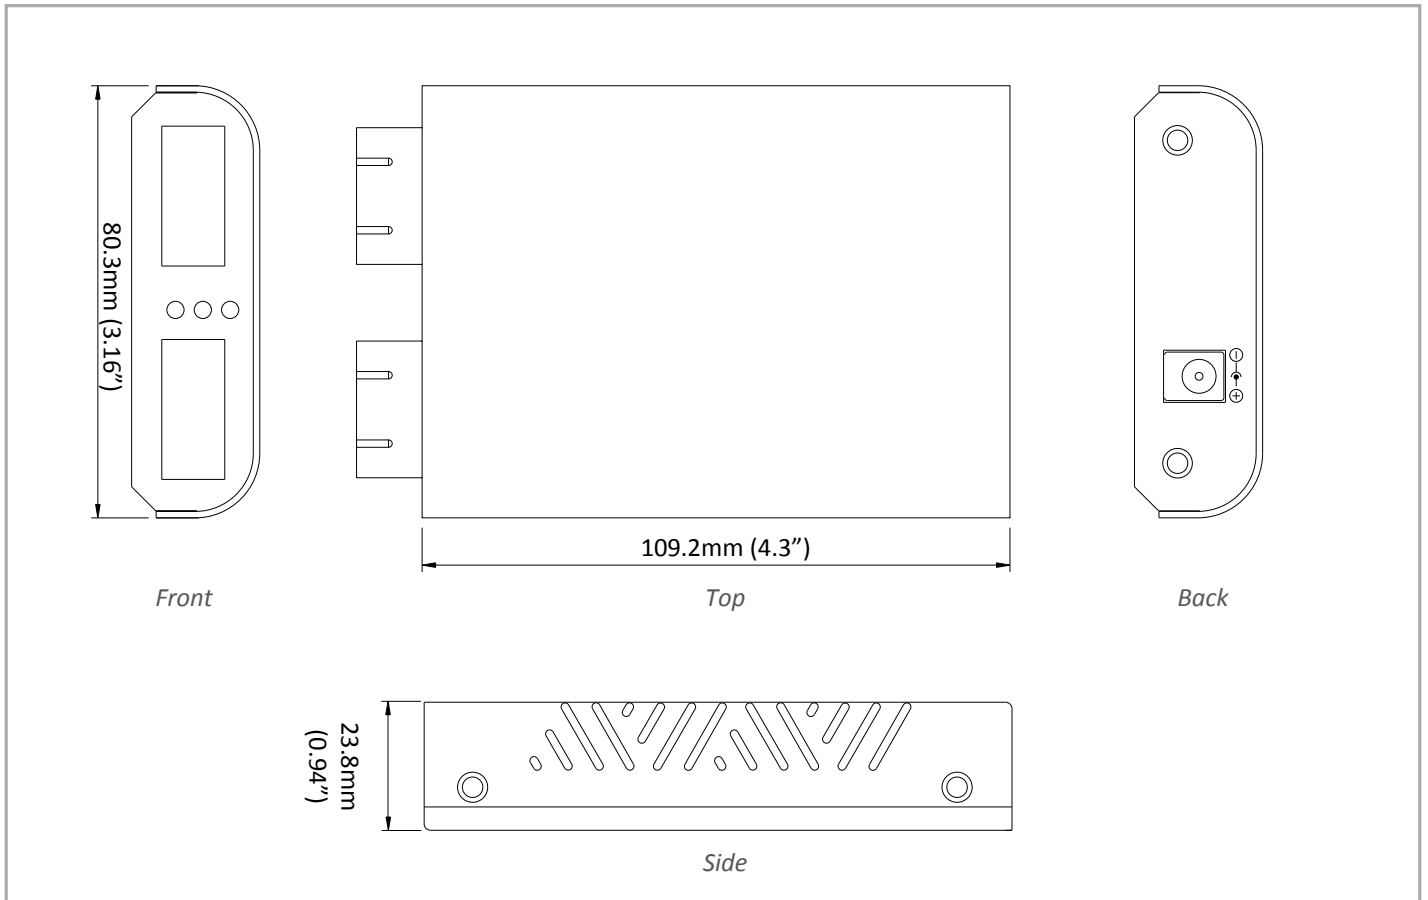

Application Diagram

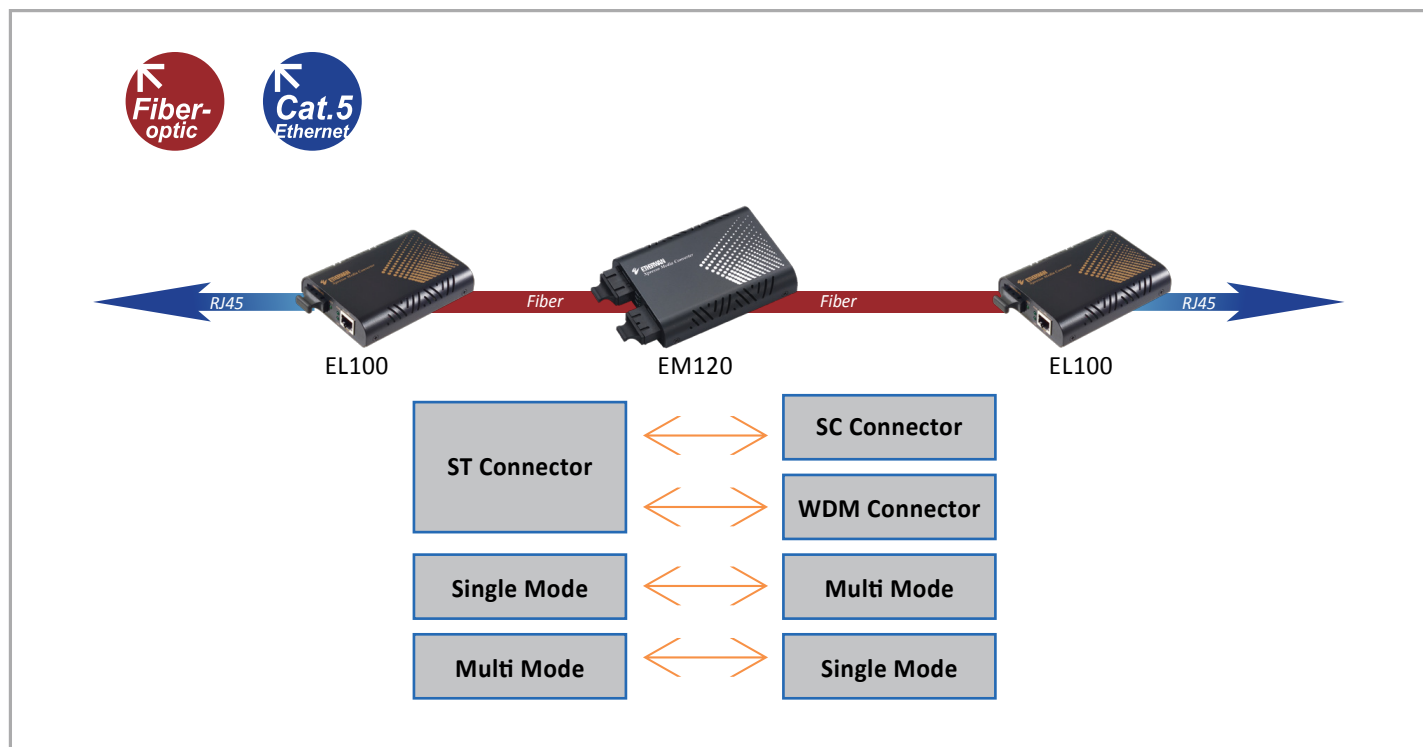

Ordering Information

Model

EM120MCC-40	100BASE-FX MultiMode(SC) to 100BASE-FX Single Mode(SC)-40Km Media Converter(1310nm)
EM120MTC-40	100BASE-FX MultiMode(ST) to 100BASE-FX Single Mode(SC)-40Km Media Converter(1310nm)
EM120MCT-20	100BASE-FX MultiMode(SC) to 100BASE-FX Single Mode(ST)-20Km Media Converter(1310nm)
EM120MTT-20	100BASE-FX MultiMode(ST) to 100BASE-FX Single Mode(ST)-20Km Media Converter(1310nm)
EM120MCCA-20	100BASE-BX MultiMode(SC) to 100BASE-FX Single Mode(SC) WDM-TX:1310nm/RX:1550nm-20Km Media Converter
EM120MCCB-20	100BASE-BX MultiMode(SC) to 100BASE-FX Single Mode(SC) WDM-TX:1550nm/RX:1310nm-20Km Media Converter
EM120MTCA-20	100BASE-BX MultiMode(ST) to 100BASE-FX Single Mode(SC) WDM-TX:1310nm/RX:1550nm-20Km Media Converter
EM120MTCB-20	100BASE-BX MultiMode(ST) to 100BASE-FX Single Mode(SC) WDM-TX:1550nm/RX:1310nm-20Km Media Converter

NOTES :

- * Single Mode to Single Mode version converters are also available
- * EMC1600, proprietary 19" chassis system, can house up to 16 x EM120 Series Converters
- * EMC1600 Chassis System is available separately
- * More 100FX fiber options are also available upon request