


## XPS-I551S

2 port 10/100/1000T + 1 port 100/1000 SFP Industrial Switch

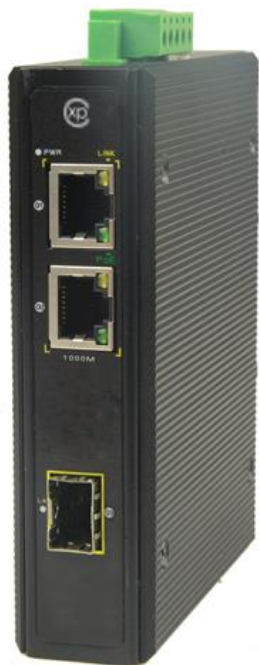

- 10/100/1000BaseT
- 100/1000 SFP
- Auto MDI/MDIX
- Auto-Negotiation
- IEEE802.3x
- LFPT

**Technical Specs.**

<b>Model No</b>	XPS-I551S
<b>Port Types</b>	2x RJ45 copper PoE ports (Auto Uplink) + 1 SFP port

**Performance**

<b>Switching Capacity</b>	6 Gbps
<b>Forwarding Rate</b>	4.46 Mmps

**Features**

IEEE 802.3	Auto-Negotiation
IEEE 802.3i	Store and Forward
IEEE 802.3u	Link Fault Pass Through

**Environment**

<b>DC Power Input</b>	12-48V
<b>Power Consumption</b>	5W
<b>Operating/Storage Temperature</b>	-40 - 75 °C / -50 - 85 °C
<b>Operating Humidity</b>	5% - 95%, non-condensing

**Mechanical**

<b>Dimension</b>	119 x 100 x 30 mm
<b>Weight</b>	0.38 kg
<b>Installation</b>	IP40 rating, DIN35 Rail Type

**Standards and Protocols**

CE mark, commercial	EN61000-3-2	EN61000-4-6
VCCI Class B	EN61000-3-3	EN61000-4-8
FCC Part 15 Class B	EN61000-4-2	IEC60068-2-6
CE/LVD EN60950	EN61000-4-3	EN61000-6-2
ISO 9001	EN61000-4-4	EN61000-6-4
EN 55022 (CISPR 22), Class B	EN61000-4-5	IEC60068-2-27 Ea

**Ordering Information**

<b>XPS-I551S</b>	2 port 10/100/1000T + 1 port 100/1000 SFP Industrial Switch
------------------	---

**Modules**

<b>XPS-I21LX</b>	XPS Industrial Dual Core LX SM 10Km SFP Module -40/75°C
<b>XPS-I21SX</b>	XPS Industrial Dual Core SX MM SFP Module -40/75°C

\*more module ranges are available upon request.