

### Fiber Optic Video & Audio Transmission 2-Channel Video + 2 Duplex Analog Audio over Fiber

2  
Video

#### System Design

Fiber Optic Video & Audio Transmitter & Receiver VOS-2200FDT/R provides for the digital transmission of 2-Channel Composite Video and 2-Channel duplex analog audio over fiber. Ideal for Broadcast/Studio ,CCTV audio and Professional AV applications.

2  
Audio

Stand-alone or rack-mount. All units of VOS-2200FDT/R come in an insert card version. The cards can be inserted into our our 14-slot, 19inch 4u or 6U rack-mountable card cage (VOS-CH04 or VOS-CH06).



Data

Single-Mode or Multi-Mode, VOS-2200FDT/R can support FC /PC or ST/PC Optical connector, can be used in Daisy-Chain system (Need to customize). The Transmission distance range according to the Optical Budget. Manufacturer's standard is: Single-mode 20km or Multi-mode 2km.




Ethernet

#### Features

- Support Point-to-Point or Daisy-Chain connection
- Uncompressed Digital Composite Video over one fiber
- 24-Bit Digitally Encoded Audio over one Fiber
- Compatible with all PAL, NTSC, SECAM Video Systems
- Multi-mode Fiber Support for Distances up to 2.0 km
- Single-Mode Fiber Support for Distances up to 100 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Stand alone or rack-mount

#### Typical Configuration

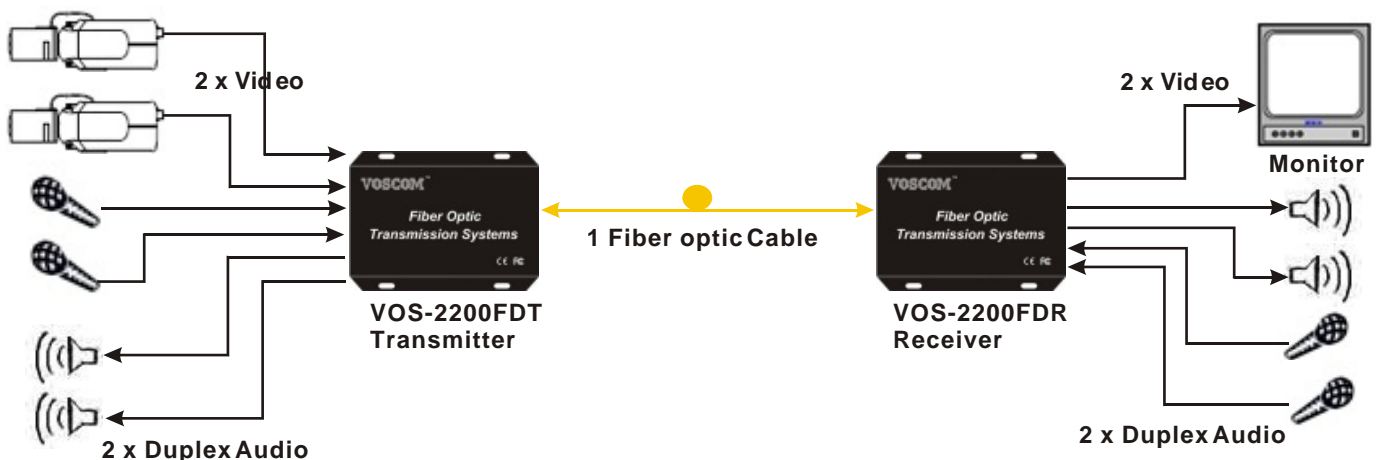

# Video & Audio over Fiber

## Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
VOS-2200FDMT	VOS-2200FDMR	Multi-Mode	1310nm/1550nm	16dB	2km
VOS-2200FDST	VOS-2200FDSR	Single-Mode	1310nm/1550nm	12dB	20km
VOS-2200FDST-4	VOS-2200FDSR-4	Single-Mode	1310nm/1550nm	18dB	40km
VOS-2200FDST-6	VOS-2200FDSR-6	Single-Mode	1310nm/1550nm	25dB	60km

### Note:

- The Optical Power Budget data fit Multi-mode(62.5/125  $\mu$  m), Single-Mode(9/125  $\mu$  m).
- When using 50/125  $\mu$  m multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

## Specification

<ul style="list-style-type: none"> <li>• Video</li> </ul>	<ul style="list-style-type: none"> <li>• Connectors</li> </ul>
<ul style="list-style-type: none"> <li>Number of Channels: 2-Channel Video</li> <li>Input/output impedance: BNC 75<math>\Omega</math></li> <li>Input/output Compatibility: PAL, NTSC, SECAM</li> <li>Input/output voltage: 1.0 Volt p-p</li> <li>Bandwidth: 6.5MHz</li> <li>Bit Resolution: 8-Bit Digital Transmission</li> <li>Differential Gain: &lt; 1.5%</li> <li>Differential Phase: &lt; 1.5°</li> <li>Tilt: &lt; 5%</li> <li>Signal-to-Noise Ratio(SNR): &gt; 67 dB</li> </ul>	<ul style="list-style-type: none"> <li>Video: 75<math>\Omega</math> BNC (Gold Center Pin)</li> <li>Audio: Terminal Block</li> <li>Optical: FC/PC or ST/PC Optional</li> <li>Stand-Alone Power: Screw terminal block</li> <li>Rack Power: AC line cord</li> </ul>
<ul style="list-style-type: none"> <li>• Audio</li> </ul>	<ul style="list-style-type: none"> <li>• Electrical &amp; Mechanical</li> </ul>
<ul style="list-style-type: none"> <li>Number of Channels: 2-Channel Duplex Audio</li> <li>Audio input/output Level: 6 dBm</li> <li>Audio in/output impedance: 600<math>\Omega</math> Unbalanced</li> <li>Bandwidth: 20Hz ~ 20KHz</li> <li>Bit Resolution: 24-Bit</li> <li>Signal-to-Noise Ratio(SNR): &gt; 80 dB</li> </ul>	<ul style="list-style-type: none"> <li>Input Power Requirements: DC 5V@2A</li> <li>Power Adapter: AC 100V~240V</li> <li>Power Consumption: &lt; 3W</li> <li>Stand-Alone Dimensions: 142mm <math>\times</math> 107mm <math>\times</math> 25mm</li> <li>Card for 4U Rack Dimensions: 145mm <math>\times</math> 170mm <math>\times</math> 20mm</li> <li>Shipping Weight: 1.8kg (include TX &amp; RX)</li> </ul>
	<ul style="list-style-type: none"> <li>• Environmental</li> </ul>
	<ul style="list-style-type: none"> <li>Operating Temperature: -45° C ~ +75° C</li> <li>Storage Temperature: -45° C ~ +85° C</li> <li>Relative Humidity: 0% ~ 95% (non-condensing)</li> <li>MTBF: &gt; 100,000 hours</li> </ul>